

This Page Is Inserted by IFW Operations  
and is not a part of the Official Record

## **BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning documents *will not* correct images,  
please do not report the images to the  
Image Problem Mailbox.**

12

# EUROPEAN PATENT APPLICATION

21 Application number: 84113305.1

51 Int. Cl.: G 03 G 9/08

22 Date of filing: 05.11.84

43 Date of publication of application:  
14.05.86 Bulletin 86/20

84 Designated Contracting States:  
BE DE FR GB IT NL

71 Applicant: HODOGAYA CHEMICAL CO., LTD.  
4-2, Toranomon 1 Chome Minato-ku  
Tokyo(JP)

72 Inventor: Nilmura, Isao c/o Hodogaya Chemical Co. Ltd.  
Chuo Kenkyusho Tokyo Bunshitsu 7-6, Kamiya 3-chome  
Kita-ku Tokyo(JP)

72 Inventor: Motohashi, Katsuichi Hodogaya Chemical Co.  
Ltd.  
Chuo Kenkyusho Tokyo Bunshitsu 7-6, Kamiya 3-chome  
Kita-ku Tokyo(JP)

72 Inventor: Yamaga, Hiroyoshi c/o Hodogaya Chemical  
Co. Ltd.  
Chuo Kenkyusho Tokyo Bunshitsu 7-6, Kamiya 3-chome  
Kita-ku Tokyo(JP)

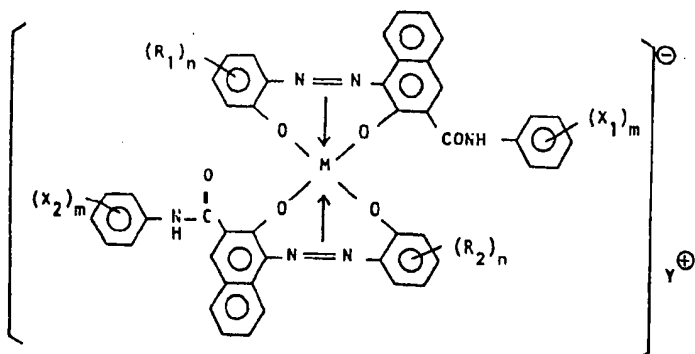
72 Inventor: Akuzawa, Noboru c/o Hodogaya Chemical Co.  
Ltd.  
Chuo Kenkyusho Tokyo Bunshitsu 7-6, Kamiya 3-chome  
Kita-ku Tokyo(JP)

74 Representative: Wächtershäuser, Günter, Dr.  
Tal 29  
D-8000 München 2(DE)

54 Electrophotographic toner.

57 An electrophotographic toner capable of being electri-  
fied negatively comprising:

- (a) a binder resin; and
- (b) a charge-controlling and coloring agent comprising  
at least one 2:1 type metal complex of the formula (I):



/...

where each of  $X_1$  and  $X_2$ , which may be the same or different, is a hydrogen atom, a  $C_1-C_6$  alkyl group, a  $C_1-C_6$  alkoxy group, a nitro group or a halogen atom, each of  $m$  and  $m'$  is an integer of 1 to 3, each of  $R_1$  and  $R_2$ , which may be the same or different, is a hydrogen atom, a  $C_1-C_6$  alkyl group, a  $C_1-C_6$  alkoxy group, a halogen atom, a nitro group, a sulfonamide group, a methylsulfonyl group, an ethylsulfonyl group, an acetyl amino group or a benzoyl amino group, each of  $n$  and  $n'$  is an integer of 1 to 3.  $Y^{(a)}$  is an ammonium ion, an aliphatic ammonium ion, an alicyclic ammonium ion or a heterocyclic ammonium ion, and  $M$  is a chromium atom, a cobalt atom or an iron atom.

- 1 -

ELECTROPHOTOGRAPHIC TONER

The present invention relates to an  
electrophotographic toner, particularly, to a toner for  
developing electrostatic latent images in  
5 electrophotography, the toner being capable of being  
electrified negatively.

It is known that in electrophotography and  
electrostatic printing, electrostatic latent images which  
are electrified either positively or negatively on a  
10 photoconductive layer containing a photoconductive  
material such as selenium, zinc oxide, cadmium, cadmium  
sulfide, zinc sulfide, tellurium, anthracene, carbazol  
compounds or polyvinyl compounds, can be converted into  
visible images by developing the latent images with a  
15 toner. The latent images are produced by imagewisely  
exposing the surface of the photoconductive layer to  
actinic rays. The visible images are, if necessary,  
transferred to a surface of a substrate, such as paper,  
and, then, fixed thereon by means of heat or a solvent.

20 The particles of the toner comprise a binder  
consisting of a natural or synthetic resin and a finely

divided coloring agent uniformly dispersed in the binder resin. The coloring agent comprises at least one member selected from dyes and pigments.

5 The toner is used alone or in combination with a solid carrier comprising finely divided glass or iron particles.

When the latent positive images are electrified negatively and negatively electrified positive images are developed with toner particles electrified positively,  
10 the resultant visible images are positive. However, when the latent positive images are electrified positively and the positively electrified positive images are developed with toner particles electrified negatively, the resultant visible images are negative.

15 Usually, conventional dyes and pigments are capable of being electrified positively. Even if the conventional dyes and pigments are capable of being electrified negatively, the quantity of electricity on the dyes or pigments is unsatisfactory.

20 Also, some types of dyes and pigments are unsatisfactorily compatible with the binder resin. Therefore, when the latent images electrified positively are developed with the toner particles containing conventional dyes or pigments, the resultant visible  
25 images are not clear and, sometimes, foggy.

Also, it is known that some types of metal-containing aromatic compound are effective as a charge-controlling

agent. However, conventional metal-containing charge-controlling agents are unsatisfactory as the coloring agent.

5 For example, U.S. Patent No. 4,206,064 discloses a negatively electrified toner for developing electrostatic images. The toner contains a charge-controlling agent comprising at least one member selected from metal complexes of salicylic acid and metal complexes of alkyl salicylic acid. However, the above-mentioned types of  
10 metal complexes are useless as a coloring agent, and exhibit an unsatisfactory compatibility with the binder resins.

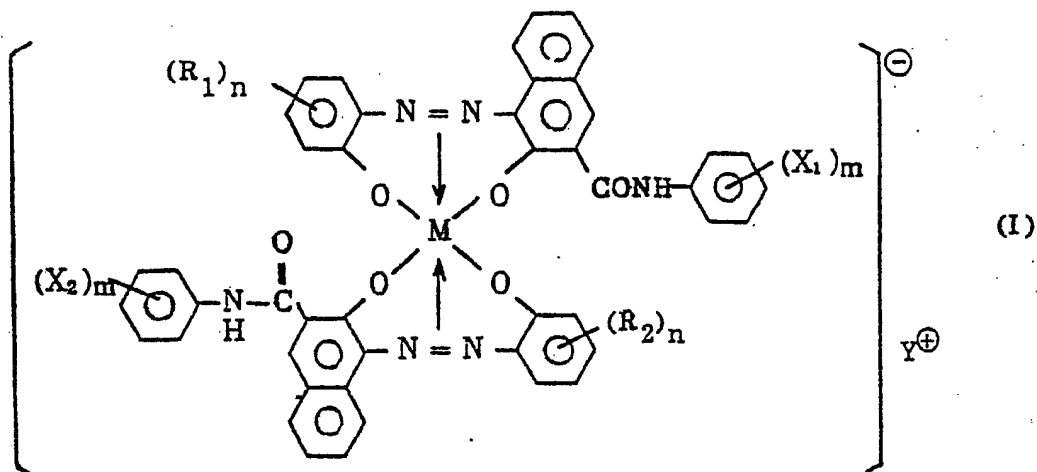
An object of the present invention is to provide an electrophotographic toner containing a metal complex  
15 which is capable of being electrified negatively and is satisfactory not only as a coloring agent, but, also, as a charge-controlling agent.

Another object of the present invention is to provide an electrophotographic toner containing a metal complex  
20 which is capable of being electrified negatively and is highly compatible with a binder resin.

The electrophotographic toner of the present invention, by which the above-mentioned objects can be attained, comprises:

25 (a) a binder resin; and

(b) a charge-controlling and coloring agent comprising at least one 2:1 type metal complex of the formula (I):



- 10 where each of  $X_1$  and  $X_2$ , which may be the same or different, is a hydrogen atom, a  $C_1$ - $C_5$  alkyl group, a  $C_1$ - $C_5$  alkoxy group, a nitro group or a halogen atom, each of  $m$  and  $m'$  is an integer of 1 to 3, each of  $R_1$  and  $R_2$ , which may be the same or different, is a hydrogen atom, a
- 15  $C_1$ - $C_5$  alkyl group, a  $C_1$ - $C_5$  alkoxy group, a halogen atom, a nitro group, a sulfonamide group, a methylsulfonyl group, an ethylsulfonyl group, an acetyl amino group or a benzoyl amino group, each of  $n$  and  $n'$  is an integer of 1 to 3,  $Y^+$  is an ammonium ion, an aliphatic ammonium ion,
- 20 an alicyclic ammonium ion or a heterocyclic ammonium ion, and  $M$  is a chromium atom, a cobalt atom or an iron atom.

The above-mentioned metal complex is highly capable of being electrified negatively and exhibits a satisfactory compatibility with the binder resin.

The electrophotographic toner of the present invention comprises a binder resin and a specific charge-controlling and coloring agent.

The binder resin may consist of at least one member  
5 selected from the group consisting of homopolymers of  
styrene or substituted styrene such as polystyrene,  
poly-p-chlorostyrene, polyvinyltoluene and the like,  
styrene copolymers such as styrene-p-chlorostyrene  
copolymers, styrene-propylene copolymers, styrene-  
10 vinyltoluene copolymers, styrene-vinylnaphthalene  
copolymers, styrene-methyl acrylate copolymers, styrene-  
ethyl acrylate copolymers, styrene-butyl acrylic acid  
copolymers, styrene-octyl acrylate copolymers, styrene-  
methyl methacrylate copolymers, styrene-ethyl  
15 methacrylate copolymers, styrene-butylmethacrylate  
copolymers, styrene-methyl- $\alpha$ -chloromethacrylate  
copolymers, styrene-acrylonitrile copolymers,  
styrene-vinyl methyl ether copolymers, styrene-vinyl  
ethyl ether copolymers, styrene-vinyl methyl ketone  
20 copolymers, styrene-butadiene copolymers, styrene-  
isoprene copolymers, styrene-acrylonitrile-indene  
copolymers, and the like, polyvinyl chloride, polyvinyl  
acetate, polyethylene, polypropylene, silicone resins,  
polyesters, polyurethanes, polyamides, epoxy resins,  
25 polyvinyl butyral, rosin, modified rosins, terpene  
resins, phenolic resins, xylene resins, aliphatic or  
alicyclic hydrocarbon resins, aromatic series petroleum



resins, chlorinated paraffins, paraffin waxes and the like.


The charge-controlling and coloring agent useful for the present invention is characterized by comprising at least one specific 2:1 type metal complex of the formula (I).

It is not completely clear why the metal complexes of the formula (I) can exhibit the remarkably high compatibility with the binder resin. However, it is assumed that, since the metal complexes of the formula (I) have a very small specific gravity and an enhanced softness, the metal complexes are easily divided into very fine particles in the binder resin matrix.


Also, it was found by the inventors of the present invention that the metal complexes of the formula (I) exhibit an excellent negative electrification property and can receive a large quantity of electrostatic negative charge.

The metal complexes of the formula (I) can be prepared by the following method:


(1) A 2-aminophenol compound of the formula (II):




and a  $\beta$ -naphthol compound of the formula (III):



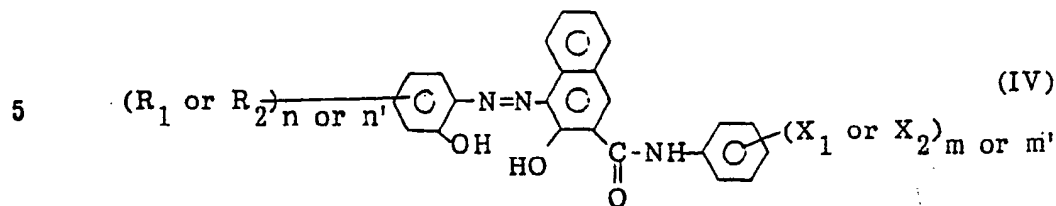are subjected to a usual coupling procedure to prepare a monoazo compound of the formula (IV):



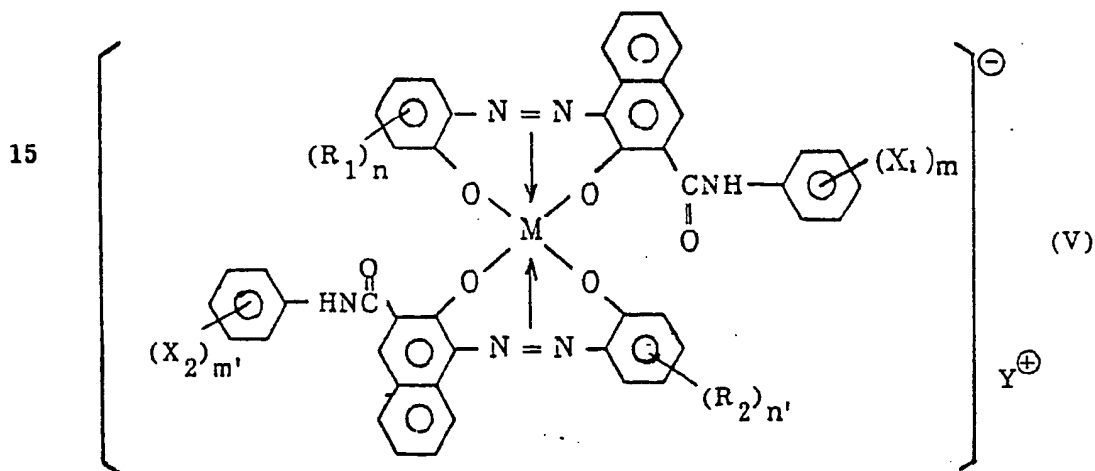(2) The monoazo compound of the formula (IV) is converted into a metal complex of the formula (V) by a conventional metallization method using a chromium-, iron- or cobalt-imparting compound in an organic solvent at an elevated temperature.



20 In the formulae (II), (III), (IV) and (V), M,  $R_1$ ,  $R_2$ ,  $X_1$ ,  $X_2$ , n, n', m or m' are as defined above, and  $Y^{\oplus}$  represents an alkali metal cation or a hydrogen cation. The metal complex compound of the formula (V) can be obtained with a high degree of yield.

25 (3) Then, the metal complex of the formula (V) is treated with ammonia, an aliphatic amine, an alicyclic

amine or a heterocyclic amine by usual salt-forming treatment, whereby the metal complex of the formula (I) where  $Y^{\oplus}$  is an ammonium ion, an aliphatic ammonium ion, an alicyclic ammonium ion or a heterocyclic ammonium ion, 5 can readily be obtained.

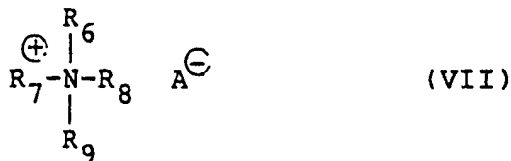
In the preparation of the metal complexes of the formula (I), the aminophenol compound of the formula (II) may be selected from 5-nitro-2-aminophenol, 4,6-dinitro-2-aminophenol, 2-aminophenol, 4-chloro-2-aminophenol, 10 4,5-dichloro-2-aminophenol, 4-methyl-2-aminophenol, 4-butyl-2-aminophenol, 4-methyl-6-nitro-2-aminophenol, 6-methyl-4-nitro-2-aminophenol, 6-chloro-4-nitro-2-aminophenol, 4-acetyl-2-aminophenol, 4-sulfoamido-2-aminophenol, 4-sulfohexylamido-2-aminophenol, 15 4-acetyl-5-methyl-2-aminophenol, 4-formyl-2-aminophenol, 3,4,6-trichloro-2-aminophenol, 4,5-dimethyl-2-aminophenol and 5-methoxy-2-aminophenol. The  $\beta$ -naphthol compound of the formula (III) may be selected from 3-hydroxy-2-naphthanilide, 3-hydroxy-4'-chloro-2-naphthanilide, 20 3-hydroxy-2-naphtho-p-anisidide, 3-hydroxy-2-naphtho-o-anisidide, 3-hydroxy-2-naphtho-o-phenetidide, 3-hydroxy-2',5'-dimethoxy-2-naphthanilide, 3-hydroxy-2-naphtho-o-toluidide, 3-hydroxy-2-naphtho-2',4'-xylidide, 3-hydroxy-3'-nitro-2-naphthanilide, 3-hydroxy-4'-chloro-25 2-naphtho-o-toluidide, and 3-hydroxy-2',4'-dimethoxy-5'-chloro-2-naphthanilide.

The chromium-imparting compound may be selected from chromic acetate, chromic sulfate and chromium sodium salicylate; the cobalt-imparting compound may be selected from cobaltic chloride, cobaltous acetate and cobalt sodium salicylate; and the iron-imparting compound may be selected from ferric acetate, ferric chloride, ferric sulfate and ferric sodium salicylate.

As the amine compound which may be used for the salt-forming treatment, there may be mentioned those represented by the following general formulas (VI) and (VII):




where each of  $R_3$ ,  $R_4$  and  $R_5$ , which may be the same or different, is a hydrogen atom, an alkyl group, a halogen atom, a hydroxyl group, an alkoxy group, an amino group, an alkyl-substituted amino group, a phenyl group, a naphthyl group, an alkyl group substituted by a heterocyclic group or an alkenyl group,  $R_3$  and  $R_4$  may form a ring together with the nitrogen atom, or may form a ring together with the nitrogen atom and a further hetero atom; and












where each of  $R_6$ ,  $R_7$ ,  $R_8$  and  $R_9$ , which may be the same or different, is an alkyl group, a halogen atom, a hydroxyl group, an alkoxy group, an amino group, an alkyl-substituted amino group, a phenyl group, a naphthyl group, an alkyl group substituted by a heterocyclic group or an alkenyl group,  $R_3$  and  $R_4$  may form a ring together with the nitrogen atom, or may form a ring together with the nitrogen atom and a further hetero atom, and  $A^{\oplus}$  is a halogen atom or a residue of an onium compound, such as a sulfonic acid group.









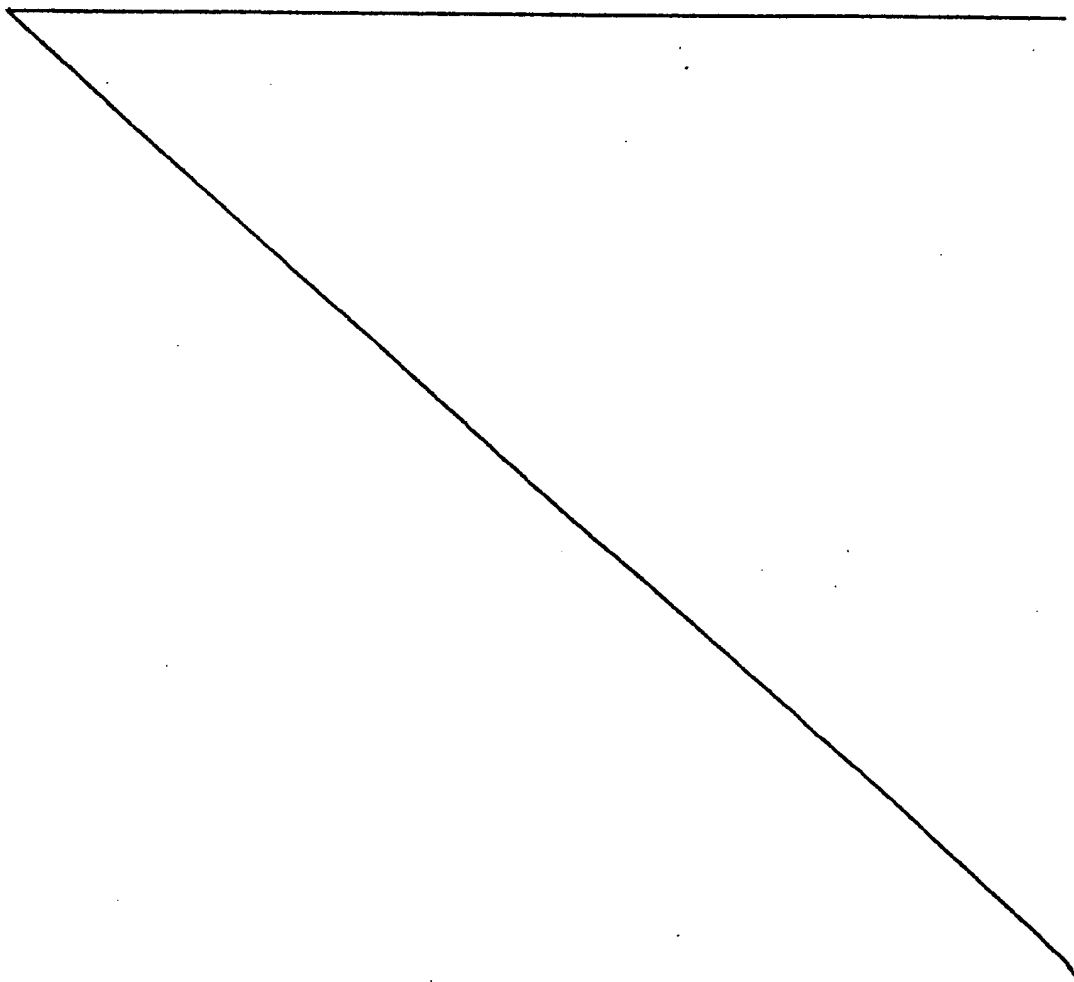
Specifically, there may be mentioned the following compounds:










0180655



0180655






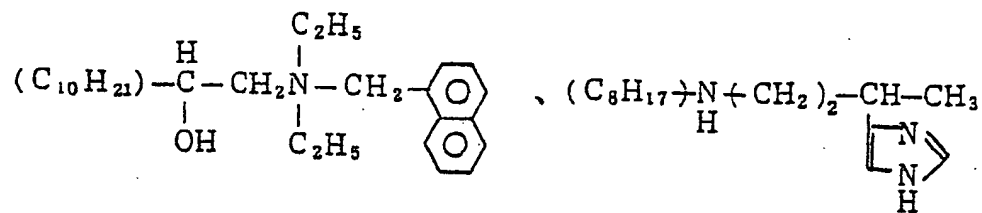


0180655

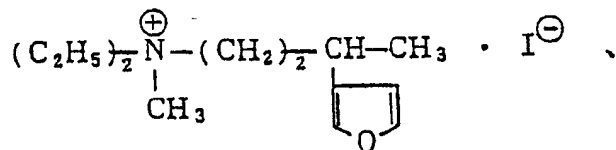



0180655



The crystals of the metal complexes of the formula (I) are extremely dividable. Therefore, the metal complexes of the formula (I), obtained from the above-mentioned preparation procedure, can be directly  
5 dispersed in the binder resin matrix, without preliminarily pulverizing the metal complexes. That is, during the dispersing procedure, the crystals of the metal complexes of the formula (I) are easily divided into extremely fine particles and the fine particles are  
10 uniformly dispersed in the binder resin matrix.

Also, the finely divided metal complexes of the formula (I) exhibit an extremely small bulk density which corresponds to  $1/5$  to  $1/7$  of that of conventional dyes. This extremely small bulk density is very effective for  
15 enhancing the compatibility of the charge-controlling and coloring agent of the present invention with the binder resin matrix.

Further, by virtue of the chemical structure with a counter ion, the metal complexes of the formula (I) have  
20 good compatibility with or solubility in various binder resins as the main component of the toner. Accordingly, when used as an additive for an electrophotographic toner, the metal complex of the formula (I) gives the toner an excellent antistatic stability in the continuous  
25 reproduction. It is particularly effective to provide stability even in a severe environment, e.g. in a high humidity condition.

Further, it provides a superior coloring power, whereby a reproduced image will be remarkably sharp, and a reproduction with a superior color tone is obtainable.

It was confirmed that the result of the mutagenity  
5 test (Ames test) applied to the metal complexes of the formula (I) was negative.

The electrophotographic toner of the present invention can be prepared in the following manner.

A 2:1 type metal complex of the formula (I) is mixed  
10 with a binder resin in the form of a melt. The amount of the metal complex is, preferably, in the range of from 1 to 50% based on the weight of the binder resin. The mixture is cooled to solidify the binder resin. The solidified mixture is converted into fine toner particles  
15 by using a pulverizing machine, such as ball mill.

Otherwise, the toner of the present invention can be prepared by the following method.

A binder resin is prepared by mixing the corresponding monomer or monomers with a polymerization  
20 initiator and a metal complex of the formula (I) and, then, the mixture is subjected to a polymerization procedure in which the mixture is suspended in water.

The most preferable preparation method for the toner of the present invention is the former mixing-solidify-  
25 ing-pulverizing method.

In the preparation of the toner, the mixture to be solidified or to be polymerized, may contain an additional coloring agent, for example, carbon black.

The toner of the present invention is used usually together with a carrier consisting of an iron or glass powder. When the mixture of the toner of the present invention and the carrier is applied to an electro-photographic procedure, friction occurs between the particles of the toner and the particles of the carrier.

This friction causes the particles of the toner to be charged with an amount of electrostatic charge, which charge is sufficient for developing electrostatic latent images. Even if the developing operation is repeatedly carried out using the toner, the amount of the electrostatic charge on the toner particles can be maintained constant, and the distribution of the charge on the toner particles can be maintained uniform and constant.

Accordingly, when electrostatic latent images are developed by the toner of the present invention, the resultant visible images have a uniform color dark enough for practical reading and are very bright in comparison with those derived from conventional toners.

The specific examples presented below will serve to more fully elaborate how the present invention is practiced. However, it should be understood that the

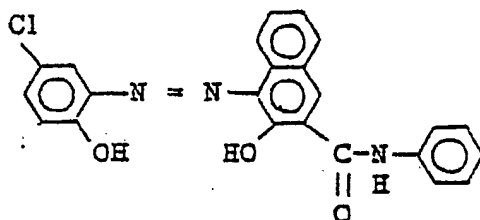
examples are only illustrative and in no way limit the present invention.

In the examples, the term "part" is always by weight.

EXAMPLE 1 and COMPARATIVE EXAMPLE 1:

5 In Example 1, a mixture was prepared by agitating  
14.4 parts of 4-chloro-2-aminophenol and 26 parts of a  
concentrated hydrochloric acid together with 400 parts of  
water. The mixture was cooled with ice to a temperature  
of 0°C to 5°C. The cooled mixture was added with 6.9  
10 parts of sodium nitrite. The admixture was agitated at  
the above-mentioned temperature for 2 hours to diazotize  
4-chloro-2-aminophenol. The admixture containing the  
diazotized compound was added to a mixture of 26.3 parts  
of 3-hydroxy-2-naphthanilide, 300 parts of water and 10  
15 parts of sodium hydroxide at a temperature of 0°C to 5°C  
to allow the diazotized compound to couple with  
3-hydroxy-2-naphthanilide. A monoazo-compound having the  
following formula was isolated from the reaction mixture.


20



The monoazo compound in the form of a paste was  
25 dissolved in 150 parts of ethylene glycol and the  
resultant solution was mixed with 5 parts of sodium  
hydroxide and 17.4 parts by weight of chromium sodium

salicylate. The mixture was agitated at a temperature of from 110°C to 120°C for 2 hours to metallize the monoazo compound with chromium. The mixture was cooled to a temperature of 50°C and the cooled mixture was added with 10 parts of hydrochloric acid to make the mixture acid when inspected by using Congo Red. The reaction product was isolated from the mixture at room temperature by means of filtration, and finally, dried at a temperature of 50°C to 60°C under a reduced pressure.

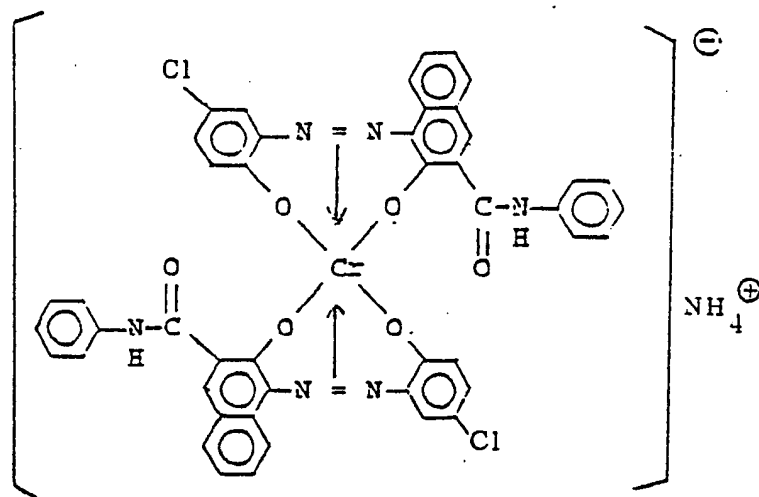A chromium complex in the form of a fine black powder was obtained in an amount of 49 parts.



When the chromium complex was dissolved in dimethyl formamide, the solution exhibited a black color having a maximum absorption wave length of 577 nm.

An electrophotographic toner was prepared by using the chromium complex in the following manner.

A uniform mixture of 100 parts of a binder resin consisting of a styrene copolymer, 6 parts of carbon black and 1 part of the chromium complex was melted at a temperature of 150°C, cooled to solidify the melt and, then, pulverized by using a ball mill. A black toner which is capable of being charged with a negative charge, was obtained. The black toner was mixed with a carrier consisting of fine iron particles having a diameter of 100 to 150 microns, in a weight ratio of 5:100, to prepare an electrophotographic developing agent.

The above-mentioned developing agent was subjected to an electrophotographic procedure as follows.

A predetermined pattern of positive electrostatic latent images was formed on a photosensitive selenium plate surface electrified by means of a corona discharge under a voltage of +5000 V. The latent images were developed with the developing agent by means of a magnetic brush development to form visible positive images. The positive images were transferred onto a piece of paper by means of a corona discharge under a voltage of +5000 V. The transferred images were heat-fixed on the paper by heating it to a temperature of 180°C. The resultant fixed visible images were clear and had no fog.

The above-mentioned electrophotographic procedures were continuously carried out 50,000 times. It was found that no change occurred in the electrification property


of the toner. Also, it was found that the average quantity of electricity on the toner was  $-20 \mu\text{c/g}$ , which was determined in accordance with the Blow-Off method, and the distribution of the electric charge on the toner was approximately even and was in the range of from  $-19.5 \mu\text{c/g}$  to  $-21.0 \mu\text{c/g}$ .

As a Comparative Example, an electrophotographic operation was conducted in the same manner as in Example 1 except that the developing agent used did not contain the metal complex of Example 1. The images thereby obtained were unclear and obscure due to inadequate electrification of the developing agent or due to a substantial change in the electrification during the continuous photocopying operation. The change in the electrification of the developing agent during the continuous photocopying operation for 5,000 reproductions (5,000 times) was from  $-10$  to  $-30 \mu\text{c/g}$ .

EXAMPLE 2:

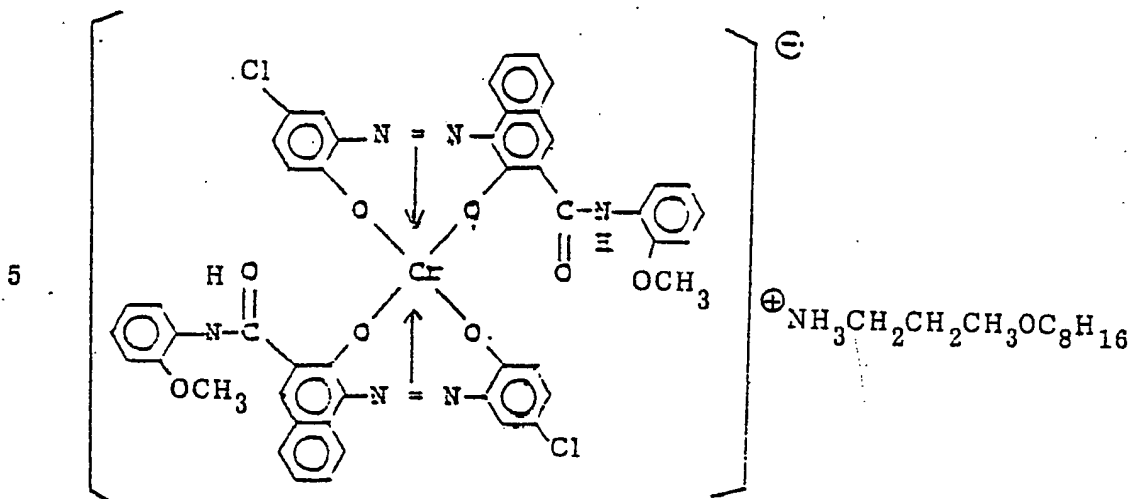The same procedures as those described in Example 1 were carried out, except that 3-hydroxy-2-naphthanilide was replaced by 29.3 parts of 3-hydroxy-2-naphto-o-anisidide, to produce a chromium complex of the formula:






10 The chromium complex was in the form of fine black particles.

The developing agent containing the above-mentioned chromium complex was effective for forming clear visible images without soiling the visible images on the

15 substrate. Also, it was confirmed that, although the developing procedures were repeated 50,000 times, no change in the electrification property of the toner occurred, and, therefore, the quality of the visible images was constant.


20 EXAMPLES 3 to 32:

In each of the Examples 3 to 9, the same procedures as those described in Example 1 were carried out, except that the monoazo compound was of the formula:



wherein, A and B represent radicals identified in Table 1; the monoazo compound was dissolved in the solvent indicated in Table 1 and, then, metallized with the metal indicated in Table 1.

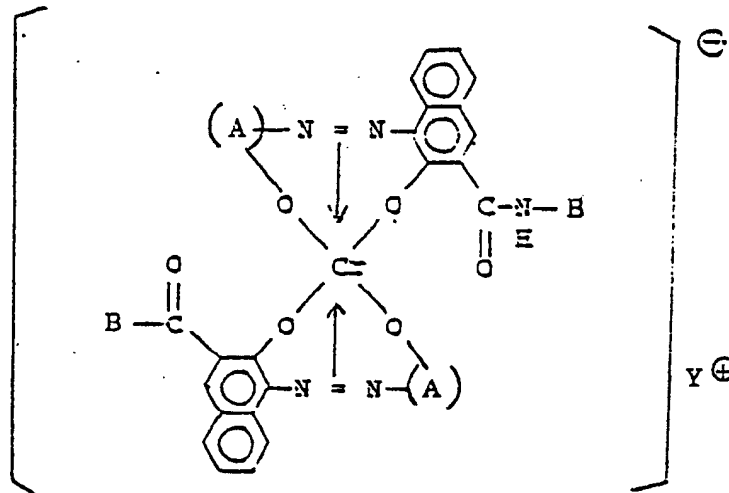5



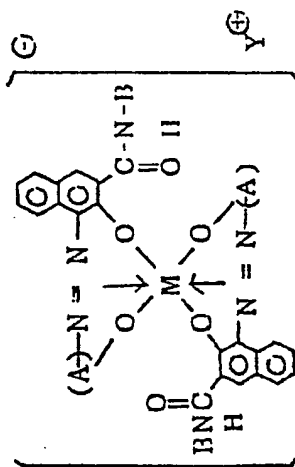
10 M represents the type of metal indicated in Table 1.  $Y^{\oplus}$  cation is also identified in Table 1.











The resultant metal complex had the maximum absorption wave length and the color indicated in Table 1.

15 The developing agent containing the above-mentioned metal complex was effective for forming clear visible images on a paper substrate without soiling around the images. Also, it was confirmed that, although the developing procedures were repeated 50,000 times, no  
20 change in electrification property of the toner occurred and the quality of the resultant visible images was constant.













0180655

Table 1


















Example No.	Type of 1 : 2 metal complex compound	Type of metal	Solvent used in metallization procedure	Type of Y <sup>+</sup> cation	Maximum absorption wave length (nm)	Appearance
3	A:  B: 	Cr	Water	H <sub>3</sub> NC <sub>3</sub> H <sub>6</sub> OC <sub>8</sub> H <sub>17</sub> <sup>+</sup>	578	Fine black particles
4	A:  B: 	"	Ethylene glycol	NH <sub>4</sub> <sup>+</sup>	583	"
5	A:  B: 	"	Diethylene glycol	H <sub>3</sub> N(C <sub>4</sub> H <sub>9</sub> ) <sup>+</sup>	577	"
6	A:  B: 	"	Dimethylformamide	"	577	"
7	A:  B: 	"	Formamide	H <sub>3</sub> NC <sub>3</sub> H <sub>6</sub> OC <sub>8</sub> H <sub>17</sub> <sup>+</sup>	577	"













0180655

Example No.	Type of 1 : 2 metal complex compound	Type of metal	Solvent used in metallization procedure	Type of $\gamma^+$ cation	Maximum absorption wave length (nm)	Appearance
8	A:  B: 	Fe	Ethylene glycol	$\text{NH}_4^+$	540	Fine black particles
9	A:  B: 	Co	"	$\text{H}_3\text{NC}_8\text{H}_{17}^+$	572	"
10	A:  B: 	Cr	Water and n-butyl alcohol (1 : 3)	$\text{H}_3\text{N}(\text{CH}_2)_5\text{CH}(\text{CH}_3)\text{Cl}^+$	560	"
11	A:  B: 	"	Dimethylformamide	$(\text{C}_2\text{H}_5)_2\text{NH}-\text{C}_{12}\text{H}_{25}-\text{CH}_2-\text{C}_6\text{H}_5^+$	558	"
12	A:  B: 	"	Methyl isopropyl ketone	$(\text{C}_2\text{H}_5)_2\text{NH}-\text{CH}_2-\text{C}_6\text{H}_4-\text{O}^+$	571	"
13	A:  B: 	"	n-butyl alcohol	$\text{NH}_4^+$	576	"



0180655

Example No.	Type of 1 : 2 metal complex compound	Type of metal	Solvent used in metalization procedure	Type of $\gamma^+$ cation	Maximum absorption wave length (nm)	Appearance
14	A:  B: 	Co	n-Butyl alcohol		572	Fine black particles
15	A:  B: 	"	Methyl ethyl ketone	"	683	"
16	A:  B: 	Cr	"	$\text{NH}_4^+$	550	"
17	A:  B: 	Co	n-Butyl alcohol	$\text{H}_3\text{NC}_{12}\text{H}_{25}^+$	545	"
18	A:  B: 	Cr	Water		570	"
19	A:  B: 	"	Diethylene glycol		540	"

[illegible]

Example No.	Type of 1 : 2 metal complex compound	Type of metal	Solvent used in metallization procedure	Type of Y <sup>+</sup> cation	Maximum absorption wave length (nm)	Appearance
26	A:  B: 	Fe	Water and ethylene glycol (1 : 2)	$(C_{12}H_{25})_2N^+CH_5$	543	Fine black particles
27	A:  B: 	Co	Dimethylformamide	$H_3N(CH_2)_5CH(Cl)CH_3$	579	"
28	A:  B: 	Fe	Water	$NH_4$	540	"
29	A:  B: 	"	Diethylene glycol	$H_2N(CH_2)_3CH(CH_3)CH_3$	540	"
30	A:  B: 	"	"	$(C_{12}H_{25})_2N^+CH_2CH_2C_6H_5$	540	"
31	A:  B: 	"	"	$H_3NC_3H_6OC_8H_{17}$	540	"

0180655


Example No.	Type of 1 : 2 metal complex compound	Type of metal	Solvent used in metalization procedure	Type of $Y^{\oplus}$ cation	Maximum absorption wave length (nm)	Appearance
32	<p>A: </p> <p>B: </p>	Fe	Water	$H_3NC_3H_6OC_8H_{17}$	538	Fine black particles



EXAMPLE 33:

Into 150 parts of ethylene glycol, 20.9 parts of the monoazo compound of the formula:

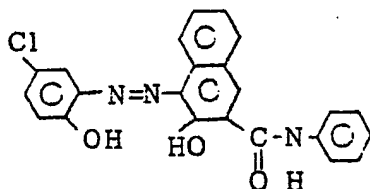5




10

prepared in the same manner as in Examples 1 to 32, was dissolved. Then, 10 parts of concentrated sulfuric acid and 4.6 parts of a 40% chromium sulfate aqueous solution was added thereto, and the mixture was stirred at a temperature of from 95 to 105°C for 3 hours to metallize the monoazo compound with chromium.

15

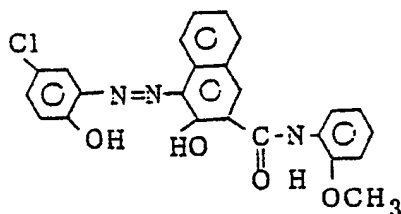Then, 22.4 parts of the monoazo compound of the formula:




20

prepared in the same manner as above, and 10 parts of sodium hydroxide were added thereto, and the mixture was stirred at a temperature of from 95 to 100°C for 2 hours. The reaction mixture was cooled to room temperature, and 5 parts of hydrochloric acid was added thereto to make the mixture acidic as inspected by using Congo Red. The reaction product was isolated from the reaction mixture at room temperature by means of filtration, and dried at

25

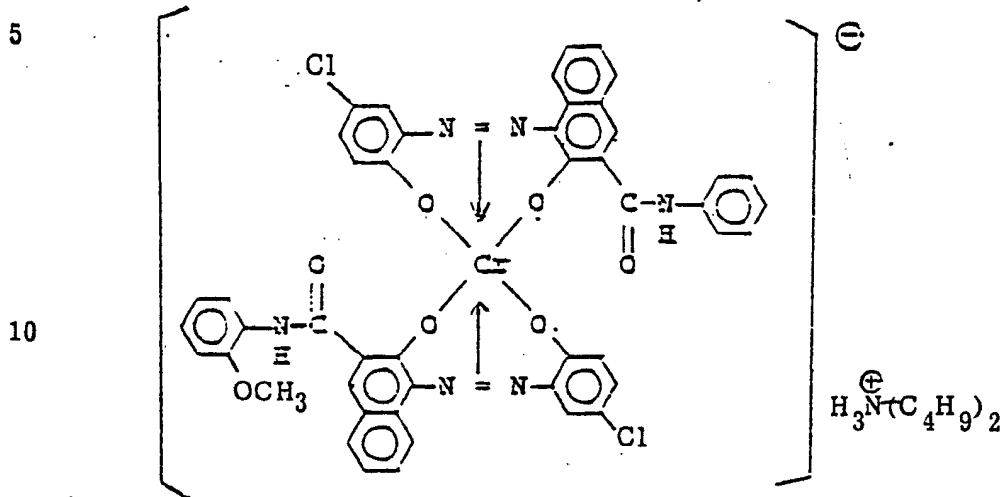a temperature of from 50 to 60°C under a reduced pressure, whereby 45 parts of a chromium complex of the formula:



having a black color was obtained.

15 The chromium complex was in the form of fine black particles. A solution of the chromium complex in dimethylformamide exhibited a maximum absorption wave length of 578 nm.

The developing agent containing the above-mentioned

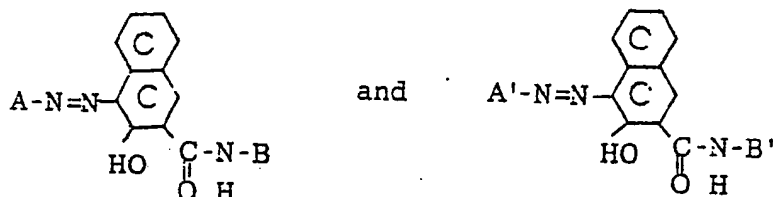
20 chromium complex was useful for producing clear visible images on a substrate consisting of paper without soil being formed around the images. Also, the developing agent could be used for repeating the developing procedures 50,000 times without changing the

25 electrification property of the toner. The quality of the developed visible images was constant during the repeated developing procedures.

EXAMPLES 34 to 48:


In each of the Examples 34 to 48, the same procedures as those described in Example 33 were carried out, except that the monoazo compound was of the formula:

5



10 wherein, A, A', B and B' represent the radicals indicated in Table 2; the monoazo compound was dissolved in the solvent indicated in Table 2 and, then, metallized with the metal indicated in Table 2.

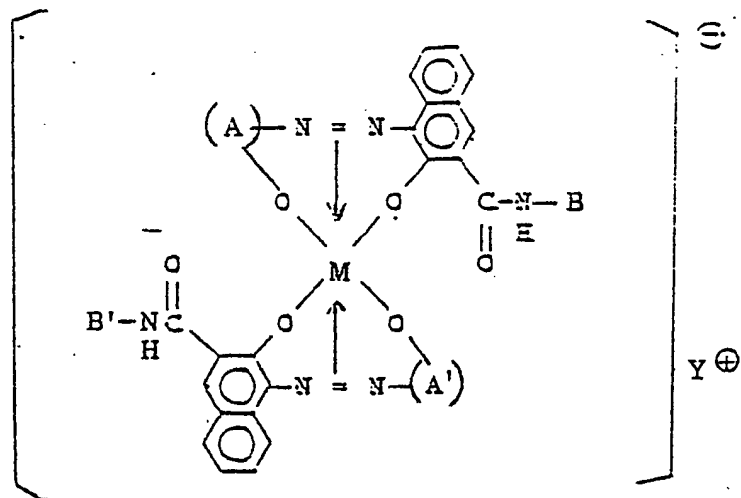15




20 M represents the type of metal indicated in Table 2.  $Y^{\oplus}$  cation is also identified in Table 2.

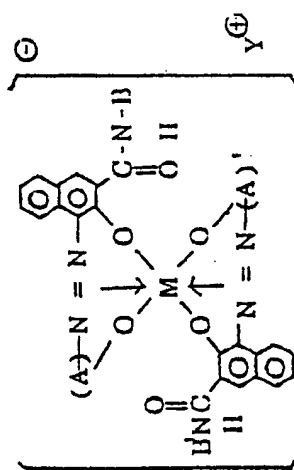The resultant metal complex had the maximum absorption wave length and the color indicated in Table 2.





















The developing agent containing the above-mentioned metal complex could form clear visible images on a paper substrate without soil being formed around the images.

Also, it was confirmed that, although the developing  
5 procedures were repeated 50,000 times, the electrification property of the toner was not changed and the quality of the resultant visible images was constant.

Table 2







Example No.	Type of 1:2 metal complex compound	Type of metal	Solvent used in metallization procedure	Type of $Y^+$ cation	Maximum absorption wavelength (nm)	Appearance
34	<p>A: </p> <p>B: </p> <p>A': </p> <p>B': </p>	Co	Diethylene glycol	$H_3NC_3H_6OC_4H_9$	577	Fine black particles
35	<p>A: </p> <p>B: </p> <p>A': </p> <p>B': </p>	Cr	"	"	570	"
36	<p>A: </p> <p>B: </p> <p>A': </p> <p>B': </p>	"	Ethylene glycol	$NH_4^+$	568	"
37	<p>A: </p> <p>B: </p> <p>A': </p> <p>B': </p>	Fe	Diethylene glycol and water (1:1)		578	"

Example No.	Type of 1 : 2 metal complex compound	Type of metal	Solvent used in metallization procedure	Type of cation	Maximum absorption wave length (nm)	Appearance
38	<p>A:  Cl</p> <p>A':  Cl</p> <p>B:  -</p> <p>B':  -</p>	"	"	$\begin{array}{c} \text{CH}_2\text{-CH}_2 \\   \quad   \\ \text{CH}_2\text{-CH}_2 \end{array} \text{N(CH}_3)_2$	579	Fine black particles
39	<p>A:  H<sub>3</sub>C</p> <p>A':  -</p> <p>B:  -</p> <p>B':  -</p>	Cr	Ethylene glycol	H <sub>3</sub> NC <sub>4</sub> H <sub>9</sub>	560	"
40	<p>A:  O<sub>2</sub>N</p> <p>A':  O<sub>2</sub>N</p> <p>B:  -</p> <p>B':  OCH<sub>3</sub></p>	"	"	"	585	"
41	<p>A:  Cl</p> <p>A':  Cl</p> <p>B:  -</p> <p>B':  NO<sub>2</sub></p>	Co	Diethylene glycol	$\begin{array}{c} \text{H} \\   \\ (\text{C}_2\text{H}_5)_2\text{N-CH}_2\text{-CH}_2\text{-O} \end{array}$	577	"
42	<p>A:  H<sub>2</sub>NO<sub>2</sub></p> <p>A':  O<sub>2</sub>N</p> <p>B:  OCH<sub>3</sub></p> <p>B':  -</p>	Fe	n-Butyl alcohol	H <sub>3</sub> NC <sub>3</sub> H <sub>6</sub> OC <sub>8</sub> H <sub>17</sub>	573	"

Example No.	Type of 1 : 2 metal complex compound	Type of metal	Solvent used in metallization procedure	Type of $\gamma^{\oplus}$ cation	Maximum absorption wavelength (nm)	Appearance
43	<p>A: </p> <p>A': </p> <p>B: </p> <p>B': </p>	Cr	Water and ethylene glycol	$\text{NH}_4^+$	575	Fine black particles
44	<p>A: </p> <p>A': </p> <p>B: </p> <p>B': </p>	Cr	Ethylene glycol	$\text{NH}_4^+$	557	"
45	<p>A: </p> <p>A': </p> <p>B: </p> <p>B': </p>	"	"	"	565	"
46	<p>A: </p> <p>A': </p> <p>B: </p> <p>B': </p>	"	"		538	"
47	<p>A: </p> <p>A': </p> <p>B: </p> <p>B': </p>	"	"		541	"

0180655

Example No.	Type of 1 : 2 metal complex compound	Type of metal	Solvent used in metallization procedure	Type of $\gamma^{\oplus}$ cation	Maximum absorption wavelength (nm)	Appearance
48	<p>A: </p> <p>B: </p> <p>A': </p> <p>B': </p>	Cr	Ethylene glycol	$\text{H}_2$ $(\text{C}_6\text{H}_{13})\text{N}-\text{CH}_2-\text{O}-\text{C}_6\text{H}_4-\text{Cl}$	585	Fine black particles




## CLAIMS:

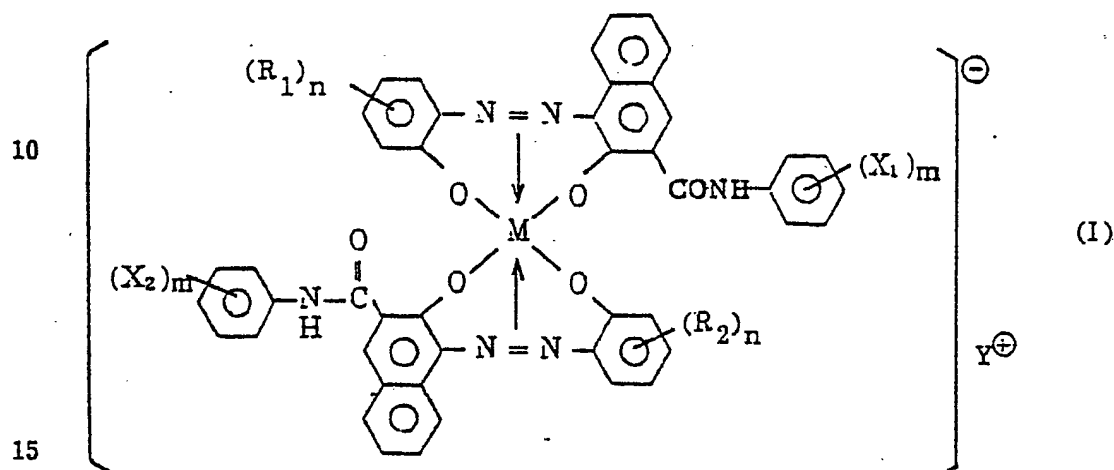1. An electrophotographic toner capable of being electrified negatively comprising:

(a) a binder resin; and

5 (b) a charge-controlling and coloring agent comprising at least one 2:1 type metal complex of the formula (I):











where each of  $X_1$  and  $X_2$ , which may be the same or different, is a hydrogen atom, a  $C_1$ - $C_5$  alkyl group, a  $C_1$ - $C_5$  alkoxy group, a nitro group or a halogen atom, each of  $m$  and  $m'$  is an integer of 1 to 3, each of  $R_1$  and  $R_2$ ,  
 20 which may be the same or different, is a hydrogen atom, a  $C_1$ - $C_5$  alkyl group, a  $C_1$ - $C_5$  alkoxy group, a halogen atom, a nitro group, a sulfonamide group, a methylsulfonyl group, an ethylsulfonyl group, an acetyl amino group or a benzoyl amino group, each of  $n$  and  $n'$  is an integer of 1  
 25 to 3,  $Y^{\oplus}$  is an ammonium ion, an aliphatic ammonium ion, an alicyclic ammonium ion or a heterocyclic ammonium ion, and  $M$  is a chromium atom, a cobalt atom or an iron atom,

provided that  $R_1$  and  $R_2$  are not simultaneously nitro groups.

2. The electrophotographic toner according to Claim 1, wherein  $Y^{\oplus}$  is a cation selected from the group consisting

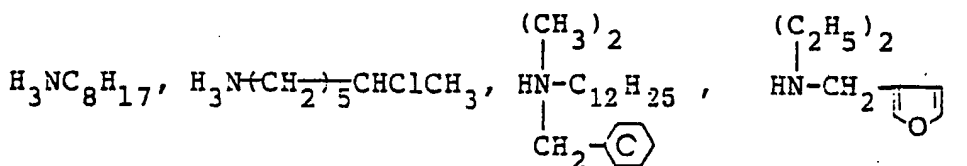5 of  $NH_4$ ,  $NH_3CH_2CH_2CH_2OC_8H_{16}$ ,  $H_3NC_3H_6OC_8H_{17}$ ,  $H_3N-(C_4H_9)$ ,



3. The electrophotographic toner according to Claim 1, wherein each of  $X_1$  and  $X_2$  is  $-H$ ,  $-NO_2$ ,  $-OCH_3$ ,  $-Cl$  or  $-CH_3$ , and each of  $R_1$  and  $R_2$  is  $-H$ ,  $-Cl$ ,  $-CH_3$ ,  $-C_4H_9$ ,  $-NO_2$ ,  $-COCH_3$ ,  $-SO_2NH_2$ ,  $-CHO$  or  $-OCH_3$ .

4. The electrophotographic toner according to Claim 1, wherein the binder resin is a homopolymer or copolymer of styrene, polyvinyl chloride, polypropylene, a silicone resin, polyvinyl butyral, rosin, modified rosin, a
- 5 terpene resin, a phenolic resin, a xylene resin, an aliphatic or alicyclic hydrocarbon, an aromatic series petroleum resin, a chlorinated paraffin, or paraffin wax.



European Patent  
Office

# EUROPEAN SEARCH REPORT

0180655

Application number

EP 84 11 3305

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int. Cl.4)
X	PATENTS ABSTRACTS OF JAPAN, vol. 8, no. 60 (P-262)[1497], 22nd March 1984; & JP - A - 58 208 750 (RICOH K.K.) 05-12-1983 * Abstract *	1-4	G 03 G 9/08
X	--- PATENTS ABSTRACTS OF JAPAN, vol. 7, no. 216 (P-225)[1361] 24th September 1983; & JP - A - 58 111 049 (HODOGAYA KAGAKU KOGYO K.K.) 01-07-1983 * Abstract *	1-4	
Y	--- PATENTS ABSTRACTS OF JAPAN, vol. 7, no. 274 (P-241)[1419], 7th December 1983; & JP - A - 58 152 256 (RICOH K.K.) 09-09-1983 * Abstract *	1-4	
A	--- EP-A-0 059 814 (HODOGAYA) * The whole document *	1-4	
			TECHNICAL FIELDS SEARCHED (Int. Cl.4)
			G 03 G 9
The present search report has been drawn up for all claims			
Place of search THE HAGUE		Date of completion of the search 12-06-1985	Examiner AMAND J.R.P.
CATEGORY OF CITED DOCUMENTS			
X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons a : member of the same patent family, corresponding document	